


SISALTUFF™ (456) EXTRA HEAVY DUTY

Size	Area	Weight
1350mm x 30m	40.5m ²	9.7kg
1350mm x 60m	81m ²	19kg
R-value*	Summer R1.8 Winter R0.7	

*Pitched metal roof with flat ceiling

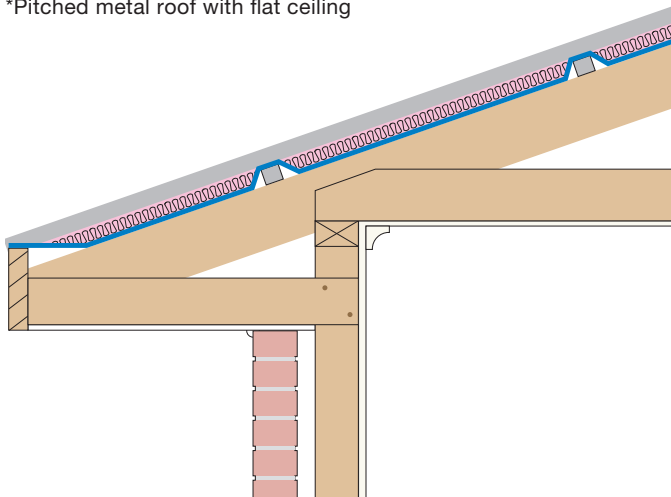

Nominal Total R-value for residential application with pitched metal roof and flat plasterboard ceiling (ventilated).

**Visit www.sisalation.com.au
or contact your local stockist.**

Fletcher Insulation – Homebush
161 Arthur St, Homebush, NSW Australia 2140.
Phone +612 9752 9200 Fax +612 9764 3175

1300 65 44 44 www.sisalation.com.au

SISALTUFF™



**At last,
a tough sarking
for residential
metal roofing**



It's finally arrived! A tough metal roof sarking, incorporating a woven polymer fabric to achieve Extra Heavy Duty classification from Sisalation®.

Fletcher Insulation has utilized its technical expertise gained over 50 years of developing Sisalation® to provide you with a metal roof sarking product that works!

SisalTuff™ has been developed specifically for use in residential metal roof applications. SisalTuff™ provides the benefits of woven polymer - familiar to users of Sisalation® 466 or Tuffstuff™, in a product that is suitable for metal roofing in residential construction.



BENEFITS OF SISALTUFF™

- Tough Extra Heavy Duty performance
- Low flammability index <5, when tested in accordance with AS1530.2
- Manufactured by a company you can trust

INSTALLATION

When used as sarking, SisalTuff™ must be installed with a 40mm dish between battens. This is required to ensure performance as a sarking and also allows for effects of high heat loads under metal in summer.

SUITABILITY

SisalTuff™ is designed for installation under residential metal roofs only. It is not intended for use under roofs of non-residential buildings. It is suitable for application under timber or steel framed homes across all climate zones and residential tiled roof applications.

